

Wireless from Castle

EE1261 Wireless PIR Detector

The slimline EE1261 wireless PIR detector is the latest addition to our 868MHz wireless range

Now featuring EchoStream Enhanced (EE) technology

- Increased network reliability by now using 4 radio channels
- Provides greater immunity from background RF noise
- Faster installation as all transmitters are automatically set to 868MHz
- Suitable for use in EN 50131-1 Grade 2 systems, where permitted



The EE1261 detector features EchoStream Enhanced technology, is suitable for use in EN 50131-1 Grade 2 systems and its sleek design means that it will blend into any environment. The detector can be fully supervised, as with the other products within the range. It has both case and wall tamper protection, an 15m range and adjustable sensitivity, therefore enabling it to be suitable for a wide range of applications.

Specification

- 868 MHz Class 6* technology
- 15m detection range
- Adjustable sensitivity
- 4 Element pyro-electric sensor
- Low profile design
- Wall and case tamper
- Flat surface or corner mounting
- Restricted case entry (tool required)
- Visible light immunity
- Temperature compensation
- Operating temperature -10 to +50°C
- Power 3.0V lithium

Dimensions: (H) 120 (W) 57 (D) 31 mm

Partcode: EE1261


Also available:

ACC665 Wall/Ceiling Mounting Bracket

ACC666 Long Range Lens.



Vertical Coverage

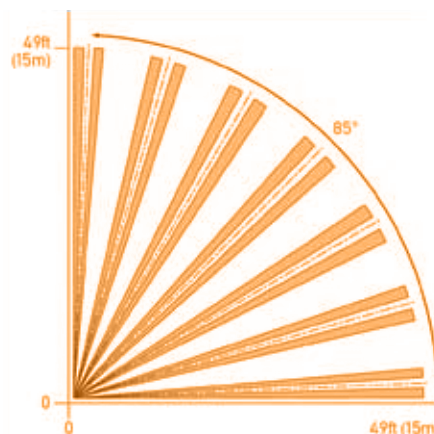

Horizontal Coverage

For further information,
visit www.castle-caretech.com/wireless

Castle.

Designers of Award-Winning Security Systems

Castle Care-Tech Ltd. First Floor,
6 Bracknell Beeches, Old Bracknell Lane West,
Bracknell, Berkshire, RG12 7BW.
T 01344 469 479 | E sales@castle-caretech.com
W www.castle-caretech.com